

SERIES 533H WITH COMPRESSION ENDS

prescal high performance pressure reducing valve

SD 012 21-05-2020

Application

Pressure reducing valves are installed in residential water systems to reduce and stabilise inlet pressures from mains water supplies or boosted water systems, which generally are too high and variable for domestic appliances to function correctly.

The Series 533H is specially designed for hot and cold services in domestic and semi-commercial applications to equalise the hot or cold water supplies or both and prevent excessive pressure at outlets such as taps and showers.

Design

The Series 533H pressure reducing valves have a specially shaped diaphragm to give accurate pressure regulation in response to changes in downstream pressure.

The control stem housing of the cartridge is made from a plastic material with a low co-efficient of adhesion, which reduces the probability of scale deposits forming, the main cause of pressure reducing valve malfunction.

The cartridge and strainer screen are easily removed for periodic cleaning and maintenance.

The Series 533H pressure reducing valve is certified according to BS EN 1567 for operating with inlet water temperatures up to 80°C.

The 533H is specifically designed for higher flow rates with a low noise level when operating.

Supplied with compression ends complying with BS EN 1254-2 for use with R250 (half hard) copper tube to BS EN 1057.


Construction Details

Component	Material	Grade
Body	DZR chrome plated	BS EN 12165 CW602
Cover	Nylon	PA 66GF30
Control stem	Stainless steel	AISI 303
Cartridge	Polymer	PPSG40
Internal components	Polymer	PSU
Diaphragm	EPDM	
Seals	EPDM	
Strainer screen	Stainless steel	AISI 304


Construction Details

Ref No	Size	Connection	Gauge
533641H	15 mm	compression	no port
533651H	22 mm	compression	no port
533741H	15 mm	compression	port only
533751H	22 mm	compression	port only
533761H	28 mm	compression	port only
533841H	15 mm	compression	with gauge
533851H	22 mm	compression	with gauge
533861H	28 mm	compression	with gauge

Dimensions

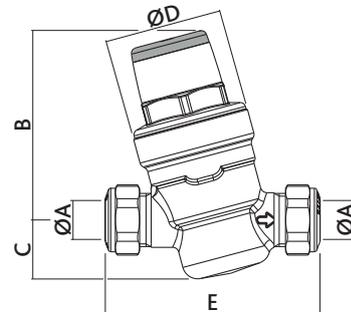

Ref No	ØA	B	C	D	E	kg
533641H	15	74.5	22	46	84	0.41
533651H	22	74.5	22	46	94	0.45

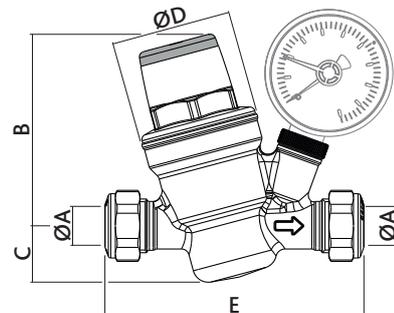

Ref No	ØA	B	C	D	E	kg
533741H	15	74.5	22	46	100	0.41
533841H	15	74.5	22	46	100	0.50
533751H	22	74.5	22	46	109	0.45
533851H	22	74.5	22	46	109	0.52
533761H	28	74.5	22	46	115	0.56
533861H	28	74.5	22	46	115	0.61

Technical Data

Max inlet pressure:	12 bar
Outlet pressure setting range:	1 to 5.5 bar
Factory setting:	3 bar
Max working temperature:	80°C
Medium:	potable water
Pressure gauge connection:	G1/4
BS EN 1567 approved	
WRAS approved product	

Recommended Flow Rates

For an average flow velocity of 2 m/s, the maximum flow rates for

Valve Size	15mm	22mm	28mm
l/m maximum	21.16	37.83	60

© Patents & Design Altecnic 2020

Altecnic Ltd retains all rights (including patents, designs and copyrights, trademarks and any other intellectual property rights) in relation to all information provided on or via the website, brochures or any other documents, including all texts, graphics and logos, contained on the website, in brochures or in any other documents published in the name of or on behalf of Altecnic Ltd in any form, without prior written consent of Altecnic Ltd.

Altecnic Ltd Mustang Drive, Stafford, Staffordshire ST16 1GW T: +44 (0)1785 218200 E: sales@altecnic.co.uk altecnic.co.uk

Registered in England No: 2095101 E & O.E © Altecnic Limited. 2020 ALTECNIC™